

SEL

10.1 x 3.1 x 3.1 mm

The SEL series offer high-amp circuit protection and surface mount fuses help space saving



Agency Approvals

Agency	Ampere Rating
Recognized Component for Canada and US	10A - 35A

Interrupting Rating

100 amperes at 250V AC
 150 amperes at 125V AC
 130 amperes at 80V DC
 300 amperes at 72V DC


Product Characteristics

Operating Temperature	-55 °C to 125 °C
Material	Body: Ceramic Termination: Gold Plated Brass Caps

Packaging

Packaging Option	Quantity
On Tape	2,500 pcs / reel

Mechanical Dimensions (mm)

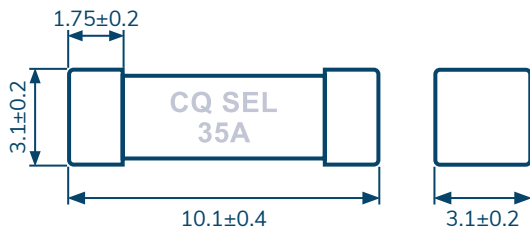

Electrical Characteristics

Ampere Rating	Opening Time	
	1 In	2 In
	MIN	MAX
10A - 35A	4 hr	60 sec

Catalog Number	Ampere Rating (A)	Voltage Rating (V)	Nominal Cold Resistance (Ohms)	Nominal Melting I ² t (A ² sec.)
SEL 010	10A	250V	0.0067	75.000
SEL 015	15A		0.0050	141.75
SEL 020	20A		0.0030	356.00
SEL 025	25A		0.0024	625.00
SEL 030	30A		0.0018	900.00
SEL 035	35A		0.0014	1320.0