



CONQUER

Electronic Fuse

NEW

Type AXT/AXT-A

6.3ØX25.4mm

RoHS



Time-Lag Ceramic Tube Fuse Series

AXT

AXT-A



Type ABB/ABB-A

6.3ØX32mm

RoHS



Super Fast Acting Ceramic Tube Fuse

ABB

ABB-A



Approval

AXT

Recognized Component for Canada and U.S.(pending)
1A~50A

Electrical Characteristic

Rated Current	1 In	2 In
	MIN	MAX
1A~50A	4 hr	120 sec

Interrupting Rating

AXT

1A~30A: 3000 amperes at 60/125/250V AC/DC
30.1A~50A: 2000 amperes at 60/125/250V AC/DC

Operating Temperature

-55°C to +125°C

Physical Specification


Material

Ceramic body / Tin Plated Brass Caps
Lead Wire:
Diameter Ø0.8 mm 12A and less
Diameter Ø1.0 mm for rating above 13A to 19A
Diameter Ø1.2 mm for rating above 20A

Packaging

In Bulk:
AXT 500 pcs
AXT-A 250 pcs per box

Mechanical Dimension

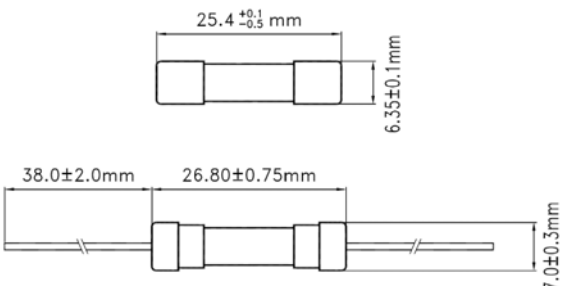

Approval

Recognized Component for Canada and U.S.(pending)
1A~30A

Electrical Characteristic

Rated Current	1 In	1.35 In	2.5 In
	MIN	MAX	MAX
1A~15A	4 hr	120 sec	0.2 sec
15.1A~30A	4 hr	300 sec	3 sec

Interrupting Rating

1A~20A: 200 amperes at 500V AC/DC
20.1A~30A: 100 amperes at 500V AC/DC

Operating Temperature

-55°C to +125°C

Physical Specification


Material

Ceramic body / Nickel Plated Brass Caps
Lead Wire:
Diameter Ø0.8 mm 12A and less
Diameter Ø1.0 mm for rating above 13A to 14A
Diameter Ø1.2 mm for rating above 15A

Packaging

In Bulk:
ABB-500 pcs
ABB-A-250 pcs per box

Mechanical Dimension

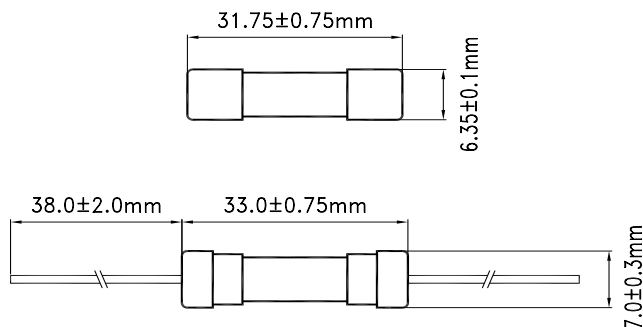

47

Conquer Electronics Co., Ltd.